

# Inteligentna Oprawa LED 1-10V

## HD HL



Model	P	lm	K	Beam	V	CRI	PF	LM/W	Dimensions	kg
HD HL 90 W	90 W	12600 lm	5000 K	60x90° 90x60° 120°	100-240 V	> 80	> 0.95	140 lm/W	L600xW80xH80 mm	6 kg
HD HL 120 W	120 W	16800 lm	5000 K	60x90° 90x60° 120°	100-240 V	> 80	> 0.95	140 lm/W	L900xW80xH80 mm	7 kg
HD HL 150 W	150 W	21000 lm	5000 K	60x90° 90x60° 120°	100-240 V	> 80	> 0.95	140 lm/W	L1200xW80xH80 mm	8,6 kg



### MATERIAŁ

**Obudowa:** aluminium  
**Dyfuzor:** poliwęglan (PC)

### ZASILANIE

**Zasilacz:** MEAN WELL ze sterowaniem 1-10V wewnątrz obudowy

### SYSTEMY DODATKOWE

**Sterowanie 1-10V**  
**DALI:** elektroniczny układ sterowania  
**Konwerter 1-10V - DALI**


### MONTAŻ

**Zwieszany:** regulowane zwieszenie linkowe


### ZASTOSOWANIE

**Hale:** produkcyjne, magazynowe  
**Centra:** handlowe, logistyczne  
**Obiekty:** przemysłowe

## FOTOMETRIA

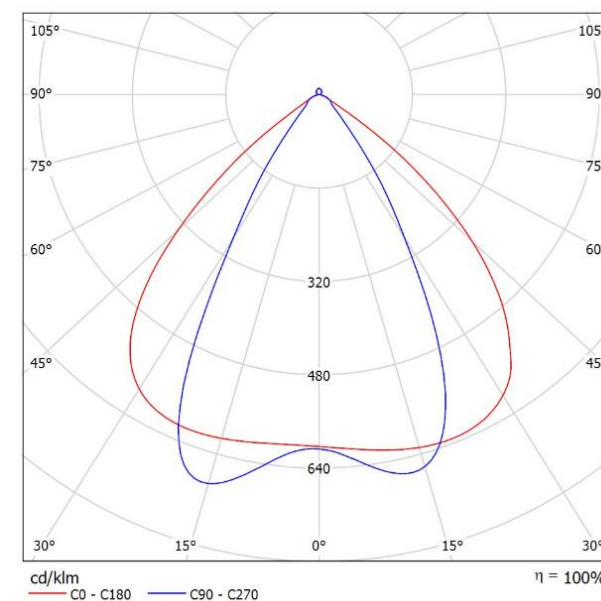

90x60°

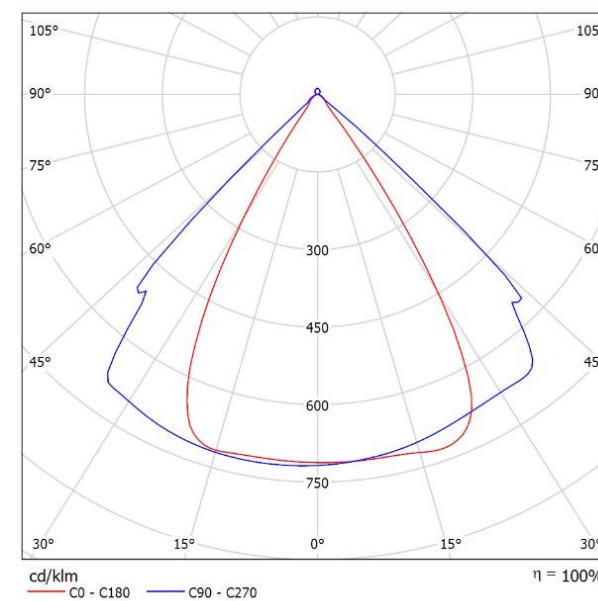

60x90°

### KONTAKT

Ledolux Poland Sp. z o.o.  
Rogoźnica 301  
36-060 Głogów Małopolski  
NIP: 8133074510  
KRS: 0000444766



tel. +48 17 741 20 00  
kom. +48 606 81 81 81  
info@ledolux.pl  
[www.ledolux.pl](http://www.ledolux.pl)