

Inteligentna Oprawa LED 1-10V

HERMES LOG N



Model	P	lm	K	°	V	CRI	PF	°C	lm/W	mm	kg
HERMES LOG N 50 W	50 W	6500 lm	4000 K	120°	198-270 V	> 80	> 0.9	-25 ÷ 40°C	130 lm/W	L1230xW95x H80 mm	3 kg
HERMES LOG N 70 W	70 W	9100 lm	4000 K	120°	198-270 V	> 80	> 0.9	-25 ÷ 40°C	130 lm/W	L1530xW95x H80 mm	4 kg
HERMES LOG N+ 75 W	75 W	11250 lm	4000 K	120°	198-270 V	> 80	> 0.9	-25 ÷ 40°C	150 lm/W	L1530xW95x H80 mm	4 kg



MATERIAŁ

Obudowa: aluminium
Dyfuzor: poliwęglan (PC)

ZASILANIE

Zasilacz: Philips lub Osram

SYSTEMY DODATKOWE

Sterowanie 1-10V
DALI: elektroniczny układ sterowania


MONTAŻ

Zwieszany: możliwość zwieszenia linkowego
Natynkowy: montaż na suficie lub ścianie

ZASTOSOWANIE

Hale: produkcyjne, magazynowe
Centra: handlowe, logistyczne
Pomieszczenia techniczne

FOTOMETRIA

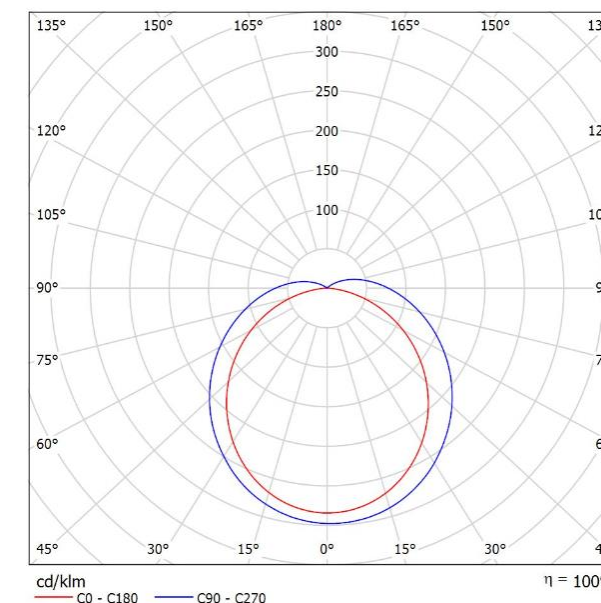

KONTAKT

Ledolux Poland Sp. z o.o.
Rogoźnica 301
36-060 Głogów Małopolski
NIP: 8133074510
KRS: 0000444766



tel. +48 17 741 20 00
kom. +48 696 966 622
info@ledolux.pl
www.ledolux.pl