

Oprawa LED Downlight



Model	P	lm	K	°	V	CRI	PF	°C	LM/W	mm	kg
Downlight 8W IP65	8 W	560 lm	4000 K	90°	195-255 V	> 80	> 0.90	-20 ÷ 40°C	70 lm/W	Ø105x H50 mm	0.2 kg
Downlight 18W IP44	18 W	1530 lm	4000 K	90°	195-255 V	> 80	> 0.90	-20 ÷ 40°C	85 lm/W	Ø152x H50 mm	0.4 kg
Downlight 24W IP44	24 W	2040 lm	4000 K	90°	195-255 V	> 80	> 0.90	-20 ÷ 40°C	85 lm/W	Ø152x H50 mm	0.4 kg
Downlight 30W IP44	30 W	2550 lm	4000 K	90°	195-255 V	> 80	> 0.90	-20 ÷ 40°C	85 lm/W	Ø203x H50 mm	0.6 kg



MATERIAŁ

Obudowa: aluminium
Dyfuzor: poliwęglan (PC)

MONTAŻ

Montaż: podtynkowy


ZASILANIE

Zasilacz: Ledolux wewnątrz obudowy

ZASTOSOWANIE

Obiekty: sanitarne, biurowe, handlowe, instytucjonalne

FOTOMETRIA

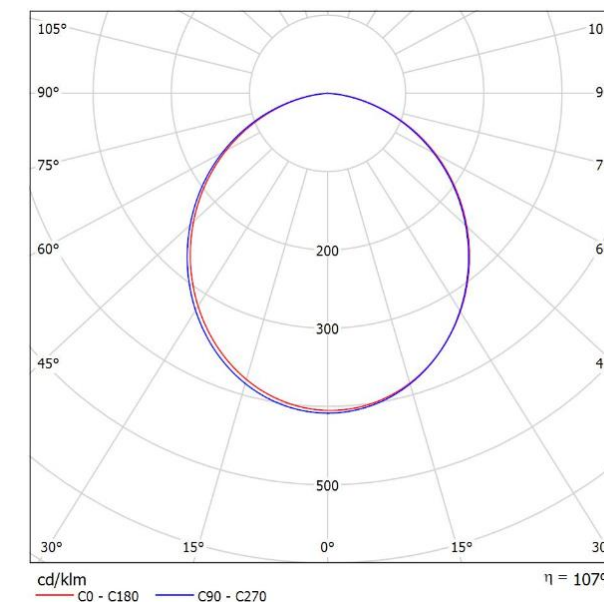

KONTAKT

Ledolux Poland Sp. z o.o.
Rogoźnica 301
36-060 Głogów Małopolski
NIP: 8133074510
KRS: 0000444766



tel. +48 17 741 20 00
kom. +48 696 966 622
info@ledolux.pl
www.ledolux.pl