

Oprawa LED DOWNLIGHT E6



Model	P	lm	K	°	V	CRI	PF	°C	mm	kg
E6 10 W	10 W	850 lm	4000 K	90°	110-277 V	> 80	> 0.9	-20 ÷ 40°C	ø115xH58 mm	0.5 kg
E6 15 W	15 W	1250 lm	4000 K	90°	110-277 V	> 80	> 0.9	-20 ÷ 40°C	ø145xH61 mm	0.5 kg
E6 20 W	20 W	1750 lm	4000 K	90°	110-277 V	> 80	> 0.9	-20 ÷ 40°C	ø190xH75 mm	0.5 kg
E6 25 W	25 W	2250 lm	4000 K	90°	110-277 V	> 80	> 0.9	-20 ÷ 40°C	ø225xH85 mm	0.5 kg



MATERIAŁ

Obudowa: aluminium/poliwęglan (PC)
Dyfuzor: poliwęglan (PC)


MONTAŻ

W suficie: podtynkowo

ZASTOSOWANIE

Obiekty: biurowe, handlowe, instytucjonalne

FOTOMETRIA

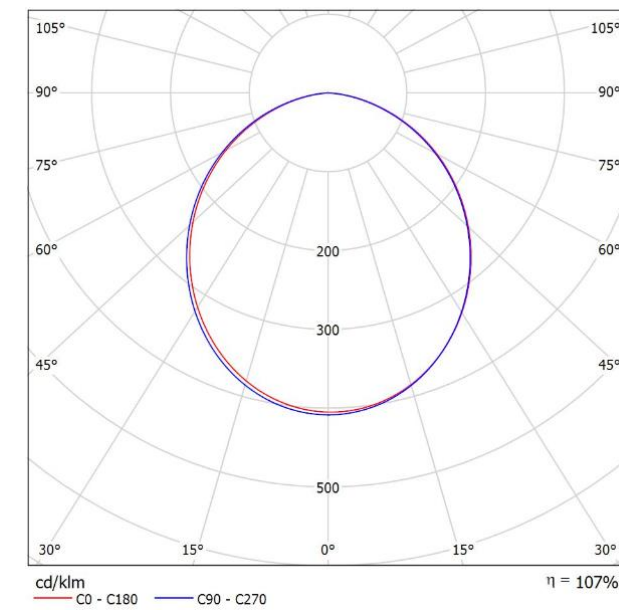

KONTAKT

Ledolux Poland Sp. z o. o.
Rogoźnica 301
36-060 Głogów Małopolski
NIP: 8133074510
KRS: 0000444766



tel. +48 17 741 20 00
kom. +48 696 966 622
info@ledolux.pl
www.ledolux.pl