

Inteligentna Oprawa LED 1-10V

HD HL



LUMILEDS

MW
MEAN WELL



Model	P	lm	K	°	V	CRI	PF	°C	lm/W	mm	kg
HD HL 90 W	90 W	12600 lm	5000 K	60x90° 120°	100-240 V	> 80	> 0.95	-20 ÷ 60°C	140 lm/W	L600xW80x H80 mm	6 kg
HD HL 120 W	120 W	16800 lm	5000 K	60x90° 120°	100-240 V	> 80	> 0.95	-20 ÷ 60°C	140 lm/W	L900xW80x H80 mm	7 kg
HD HL 150 W	150 W	21000 lm	5000 K	60x90° 120°	100-240 V	> 80	> 0.95	-20 ÷ 60°C	140 lm/W	L1200xW80x H80 mm	8,6 kg

LEDOLUX

P O L A N D

MATERIAŁ

Obudowa: aluminium
Dyfuzor: soczewki z PC

ZASILANIE

Zasilacz: MEAN WELL ze sterowaniem 1-10V wewnątrz obudowy

SYSTEMY DODATKOWE

Sterowanie 1-10V
DALI: elektroniczny układ sterowania



MONTAŻ

Zwieszany: regulowane zwieszenie linkowe


ZASTOSOWANIE

Hale: produkcyjne, magazynowe
Centra: handlowe, logistyczne

➤ RYS. TECHNICZNY

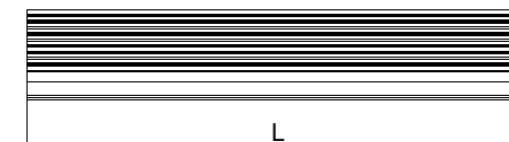

➤ FOTOMETRIA

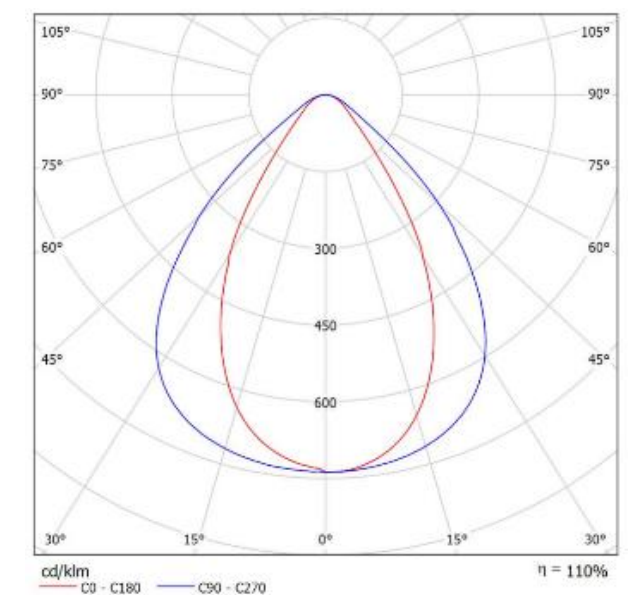

60x90°

KONTAKT

Ledolux Poland Sp. z o.o.
Rogoźnica 301
36-060 Głogów Małopolski
NIP: 8133074510
KRS: 0000444766

tel. +48 17 741 20 00
kom. +48 696 966 622

info@ledolux.pl
www.ledolux.pl

LEDOLUX

P O L A N D